

Principles of Programming Languages

<http://www.di.unipi.it/~andrea/Didattica/PLP-14/>

Prof. Andrea Corradini

Department of Computer Science, Pisa

Lesson 25

- Type inference

Type Checking vs Type Inference

- Standard type checking:

```
int f(int x) { return x+1; };  
int g(int y) { return f(y+1)*2; };
```

- Examine body of each function
- Use declared types to check agreement

- Type inference:

```
int f(int x) { return x+1; };  
int g(int y) { return f(y+1)*2; };
```

- Examine code without type information. Infer the most general types that could have been declared.

ML and Haskell are *designed* to make type inference feasible.

Why study type inference?

- Types and type checking
 - Improved steadily since Algol 60
 - Eliminated sources of unsoundness.
 - Become substantially more expressive.
 - Important for modularity, reliability and compilation
- Type inference
 - Reduces syntactic overhead of expressive types.
 - Guaranteed to produce most general type.
 - Widely regarded as important language innovation.
 - Illustrative example of a flow-insensitive static analysis algorithm.

History

- Original type inference algorithm
 - Invented by Haskell Curry and Robert Feys for the simply typed lambda calculus in 1958
- In 1969, Hindley
 - extended the algorithm to a richer language and proved it always produced the most general type
- In 1978, Milner
 - independently developed equivalent algorithm, called algorithm W, during his work designing ML.
- In 1982, Damas proved the algorithm was complete.
 - Currently used in many languages: ML, Ada, Haskell, C# 3.0, F#, Visual Basic .Net 9.0. Have been plans for Fortress, Perl 6, C+ +0x,...

uHaskell

- Subset of Haskell to explain type inference.
 - Haskell and ML both have overloading
 - Will not cover type inference with overloading

```
<decl> ::= [<name> <pat> = <exp>]
<pat> ::= Id | (<pat>, <pat>) | <pat> : <pat> | []
<exp> ::= Int | Bool | [] | Id | (<exp>)
          | <exp> <op> <exp>
          | <exp> <exp> | (<exp>, <exp>)
          | if <exp> then <exp> else <exp>
```

Type Inference: Basic Idea


- Example

```
f x = 2 + x
> f :: Int -> Int
```


- What is the type of **f**?
 - + has type: **Int → Int → Int**
 - 2** has type: **Int**
- Since we are applying **+** to **x** we need **x :: Int**
- Therefore **f x = 2 + x** has type **Int → Int**

Step 1: Parse Program

- Parse program text to construct parse tree.

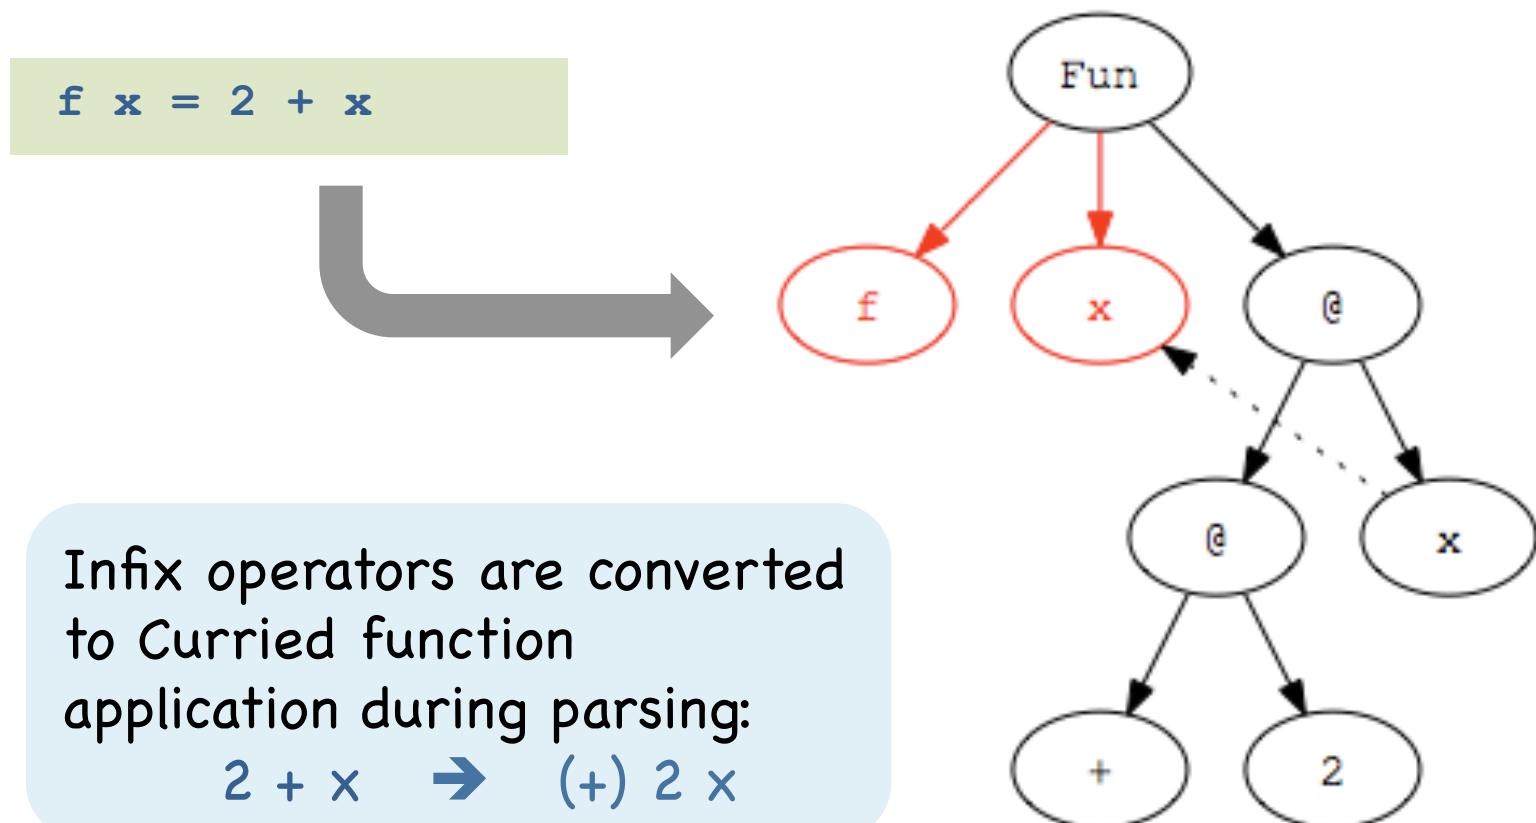


Step 2: Assign type variables to nodes

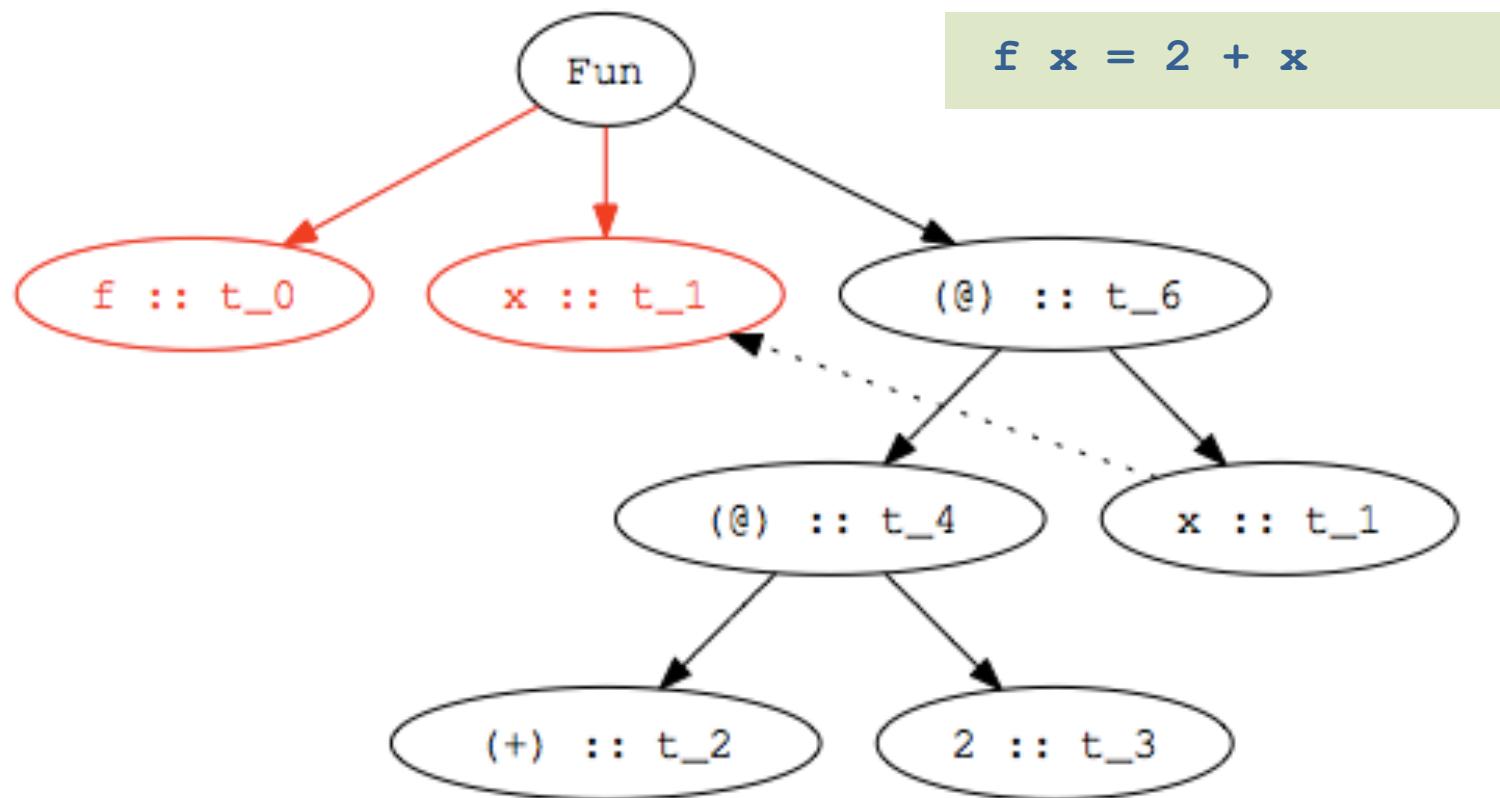

Variables are given same type
as binding occurrence.

Step 3: Add Constraints

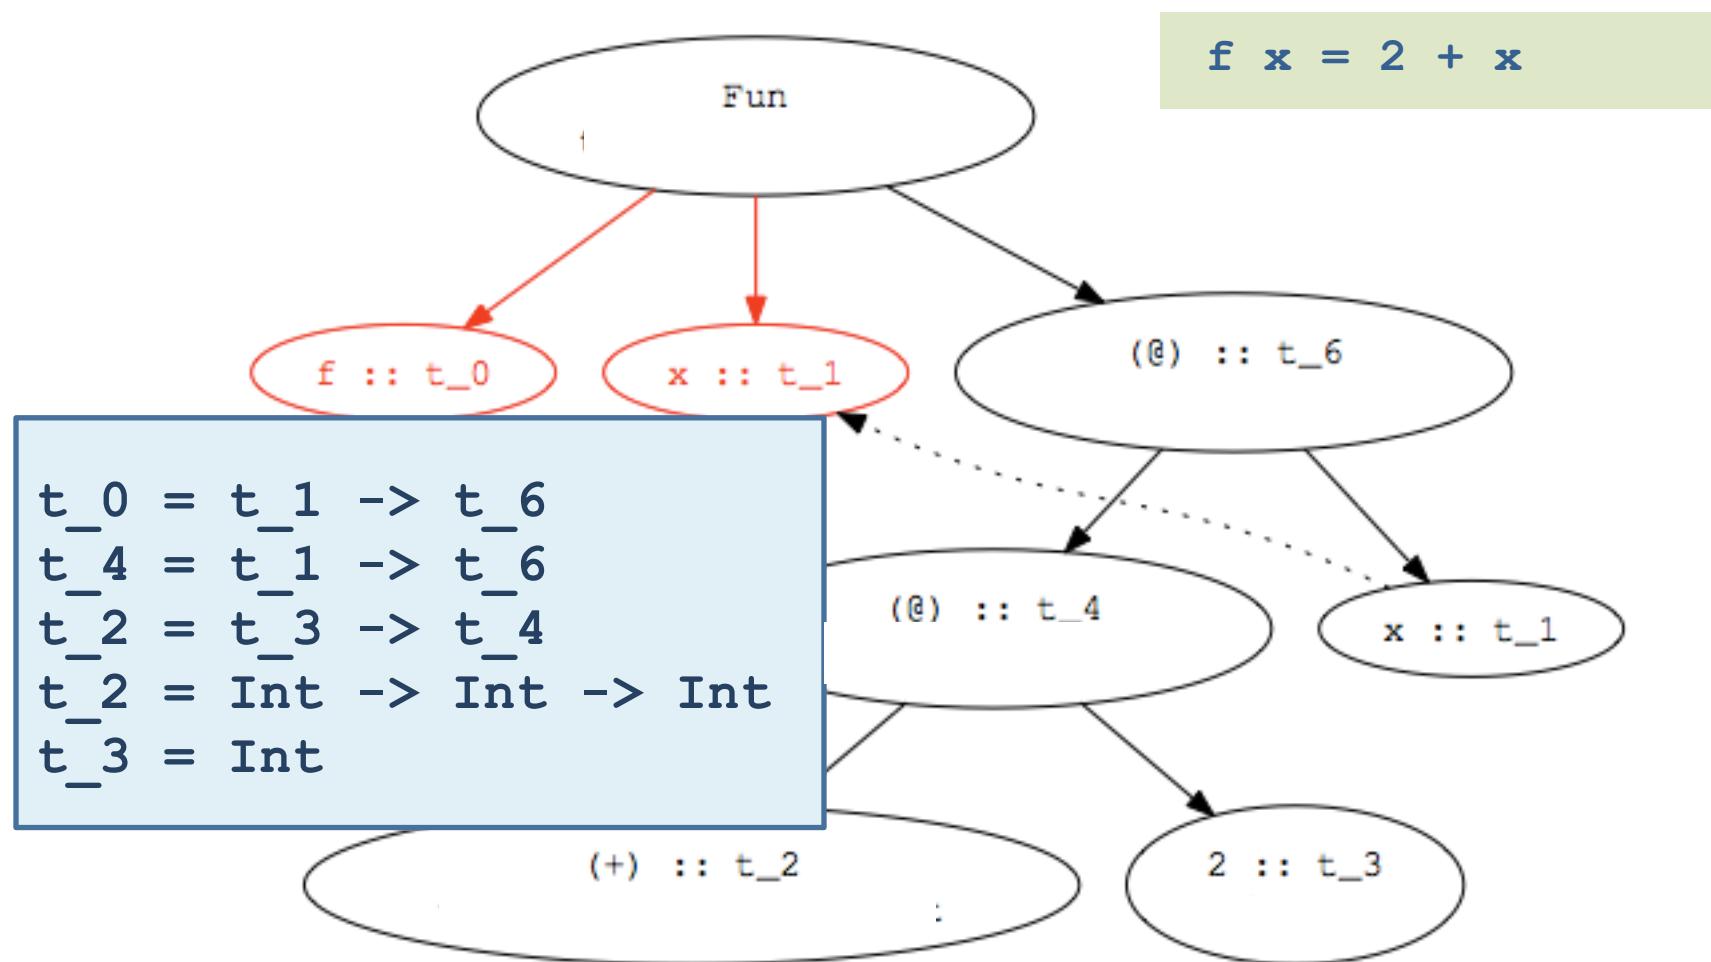

Step 4: Solve Constraints

```
t_0 = t_1 -> t_6  
t_4 = t_1 -> t_6  
t_2 = t_3 -> t_4  
t_2 = Int -> Int -> Int  
t_3 = Int
```

```
t_3 -> t_4 = Int -> (Int -> Int)
```

```
t_0 = t_1 -> t_6  
t_4 = t_1 -> t_6  
t_4 = Int -> Int  
t_2 = Int -> Int -> Int  
t_3 = Int
```

```
t_3 = Int  
t_4 = Int -> Int
```

```
t_1 -> t_6 = Int -> Int
```


```
t_0 = Int -> Int  
t_1 = Int  
t_6 = Int  
t_4 = Int -> Int  
t_2 = Int -> Int -> Int  
t_3 = Int
```

```
t_1 = Int  
t_6 = Int
```

Step 5: Determine type of declaration

```
t_0 = Int -> Int  
t_1 = Int  
t_6 = Int -> Int  
t_4 = Int -> Int  
t_2 = Int -> Int -> Int  
t_3 = Int
```


```
f x = 2 + x  
> f :: Int -> Int
```

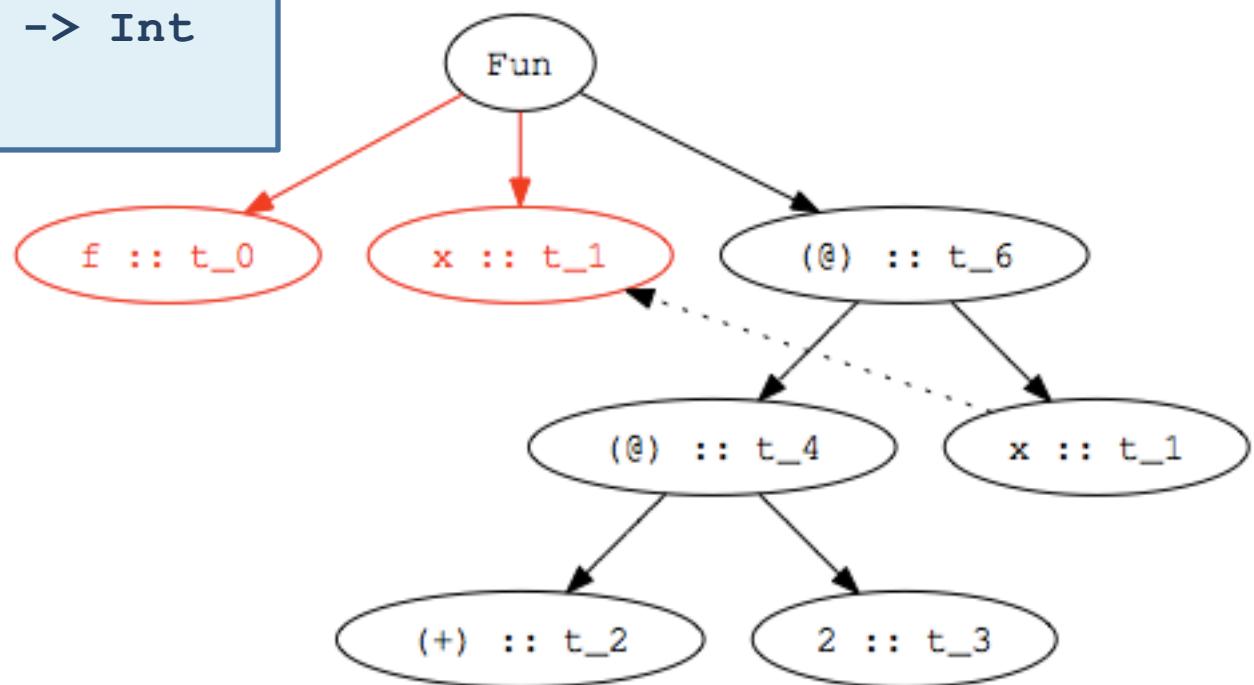

Type Inference Algorithm


- Parse program to build parse tree
- Assign type variables to nodes in tree
- Generate constraints:
 - From environment: constants (2), built-in operators (+), known functions (tail).
 - From form of parse tree: e.g., application and abstraction nodes.
- Solve constraints using *unification*
- Determine types of top-level declarations

Constraints from Application Nodes

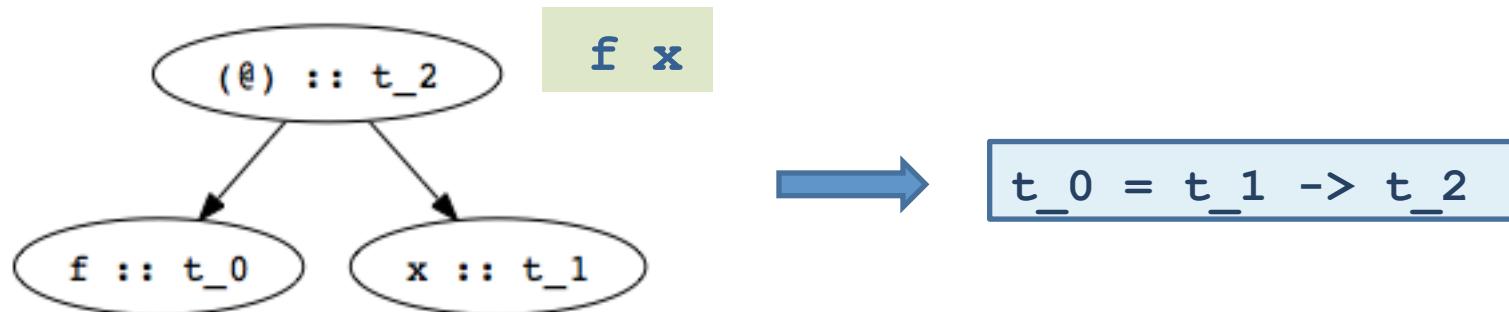

- Function application (apply f to x)
 - Type of f (t_0 in figure) must be domain \rightarrow range.
 - Domain of f must be type of argument x (t_1 in fig)
 - Range of f must be result of application (t_2 in fig)
 - Constraint: $t_0 = t_1 \rightarrow t_2$

Constraints from Abstractions

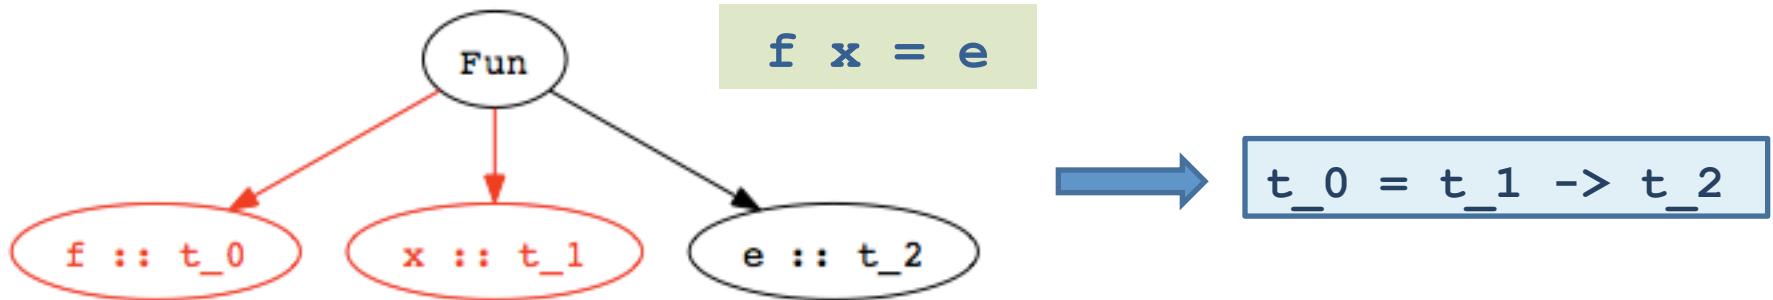

- Function declaration:
 - Type of f (t_0 in figure) must domain \rightarrow range
 - Domain is type of abstracted variable x (t_1 in fig)
 - Range is type of function body e (t_2 in fig)
 - Constraint: $t_0 = t_1 \rightarrow t_2$


Inferring Polymorphic Types

- Example:

```
f g = g 2  
> f :: (Int -> t_4) -> t_4
```

- Step 1:

Build Parse Tree

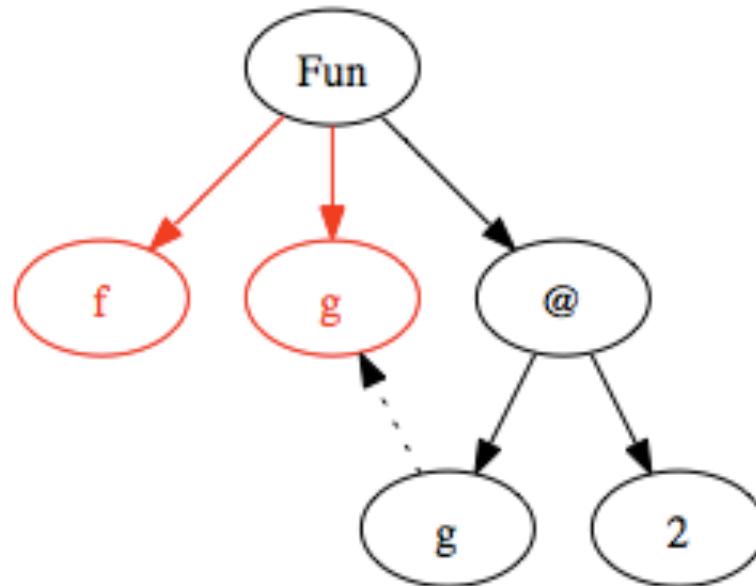


Inferring Polymorphic Types

- Example:
- Step 2:

```
f g = g 2  
> f :: (Int -> t_4) -> t_4
```

Assign type variables

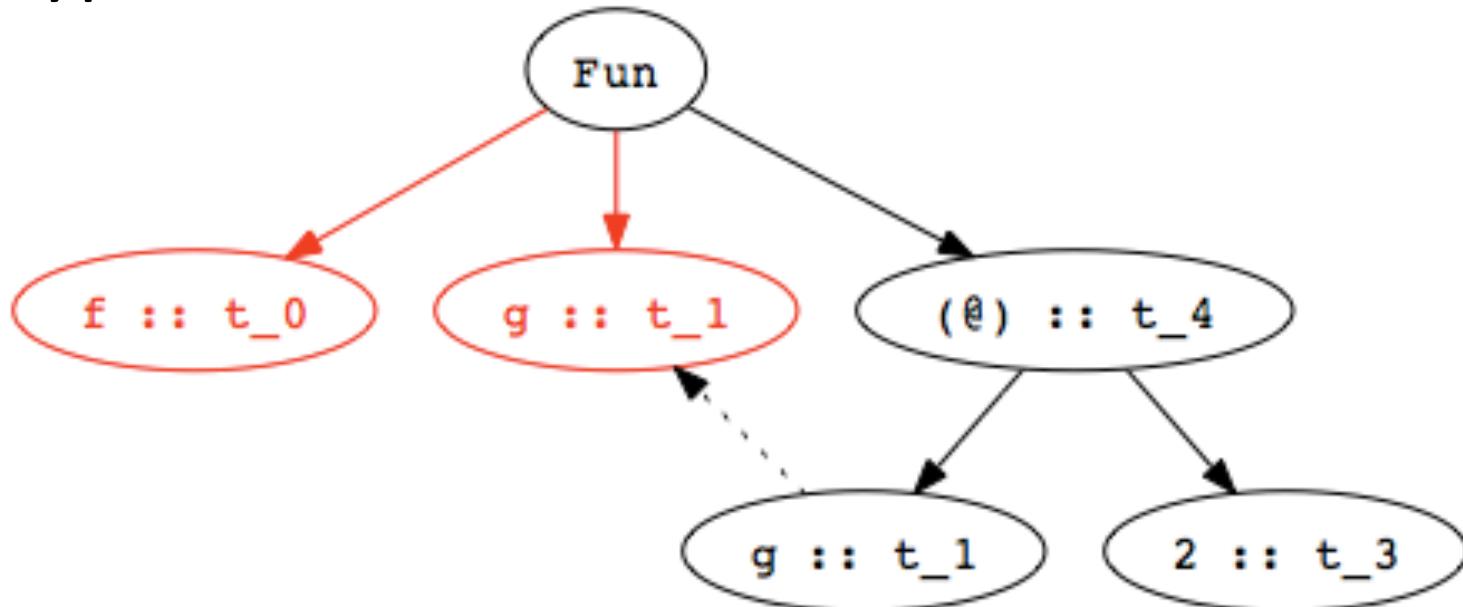


Inferring Polymorphic Types

- Example:
- Step 3:

```
f g = g 2
> f :: (Int -> t_4) -> t_4
```

Generate constraints

```
t_0 = t_1 -> t_4
t_1 = t_3 -> t_4
t_3 = Int
```

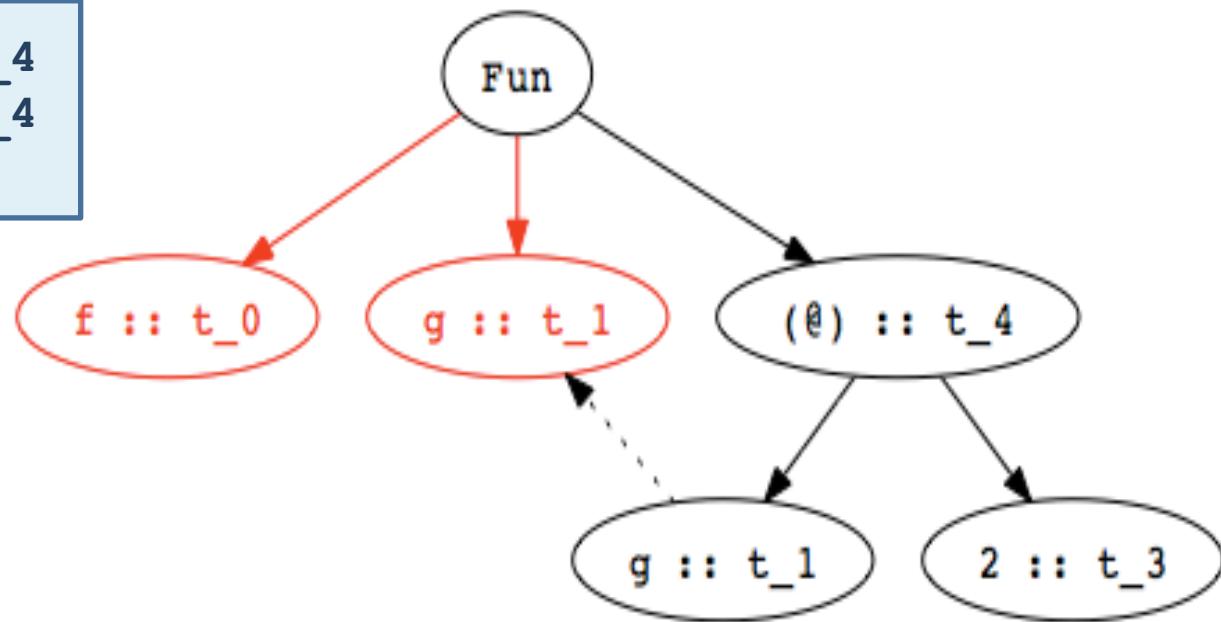

Inferring Polymorphic Types


- Example:

```
f g = g 2  
> f :: (Int -> t_4) -> t_4
```


- Step 4:

Solve constraints

```
t_0 = t_1 -> t_4  
t_1 = t_3 -> t_4  
t_3 = Int
```



```
t_0 = (Int -> t_4) -> t_4  
t_1 = Int -> t_4  
t_3 = Int
```

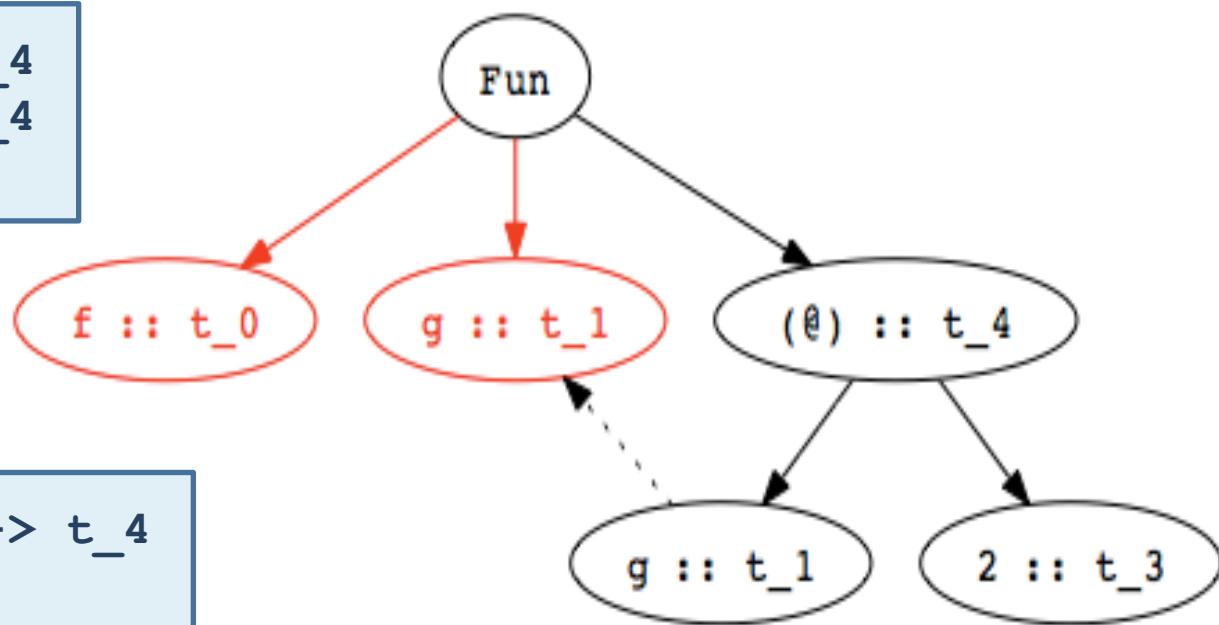


Inferring Polymorphic Types

- Example:
- Step 5:

```
f g = g 2
> f :: (Int -> t_4) -> t_4
```

Unconstrained type variables become polymorphic types.

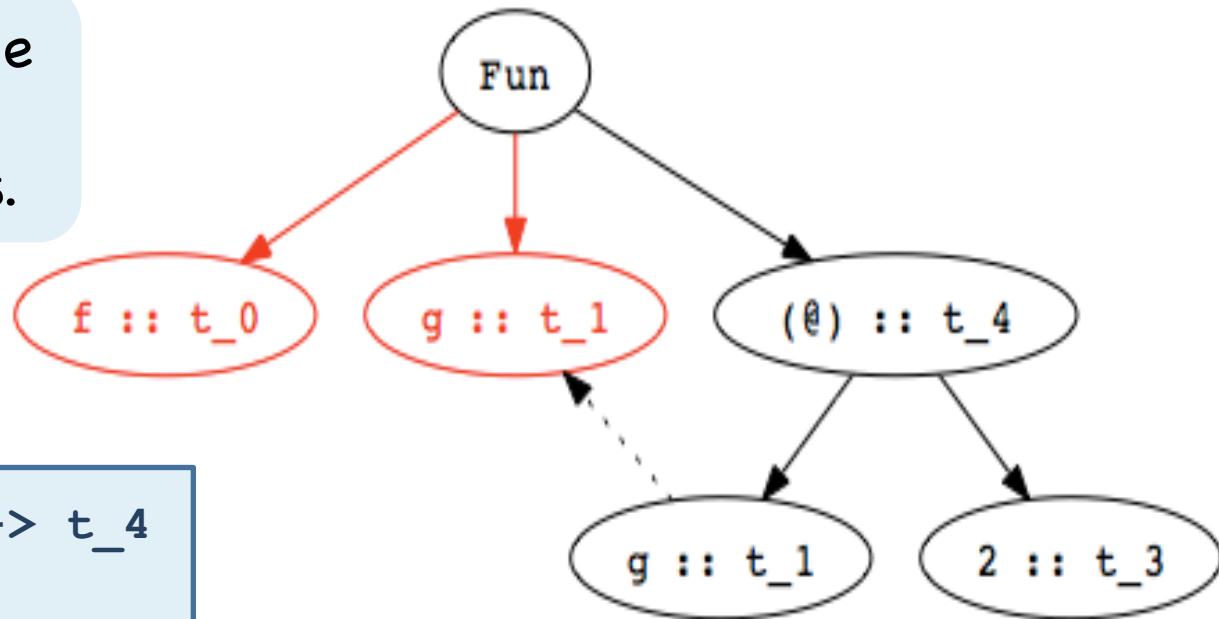

```
t_0 = (Int -> t_4) -> t_4
t_1 = Int -> t_4
t_3 = Int
```

Using Polymorphic Functions

- Function:

```
f g = g 2  
> f :: (Int -> t_4) -> t_4
```

- Possible applications:

```
add x = 2 + x  
> add :: Int -> Int  
  
f add  
> 4 :: Int
```

```
isEven x = mod (x, 2) == 0  
> isEven :: Int -> Bool  
  
f isEven  
> True :: Int
```

Recognizing Type Errors

- Function:

```
f g = g 2
> f :: (Int -> t_4) -> t_4
```

- Incorrect use

```
not x = if x then True else False
> not :: Bool -> Bool
f not
> Error: operator and operand don't agree
operator domain: Int -> a
operand:           Bool -> Bool
```

- Type error:

cannot unify $\text{Bool} \rightarrow \text{Bool}$ and $\text{Int} \rightarrow t$


Another Example

- Example:

```
f (g,x) = g (g x)  
> f :: (t_8 -> t_8, t_8) -> t_8
```

- Step 1:

Build Parse Tree

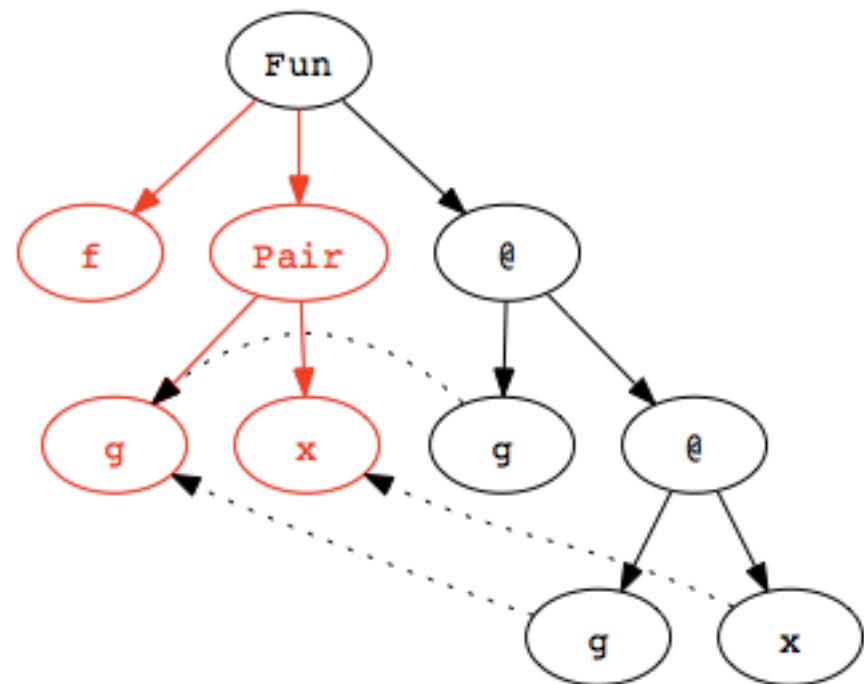


Another Example

- Example:

```
f (g, x) = g (g x)  
> f :: (t_8 -> t_8, t_8) -> t_8
```

- Step 2:

Assign type variables

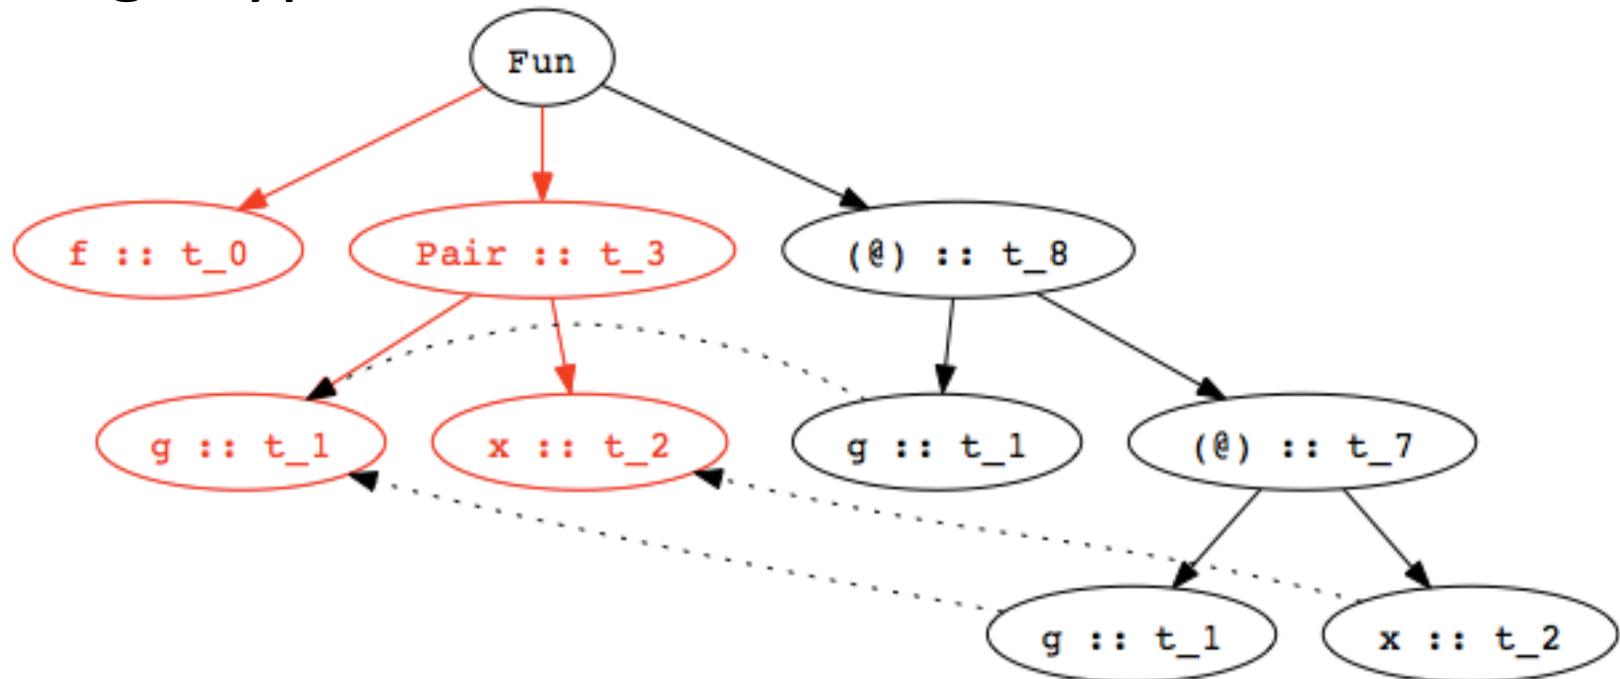


Another Example

- Example:

$$\begin{aligned} f(g, x) &= g(g x) \\ > f :: (t_8 \rightarrow t_8, t_8) \rightarrow t_8 \end{aligned}$$

- Step 3:

Generate constraints

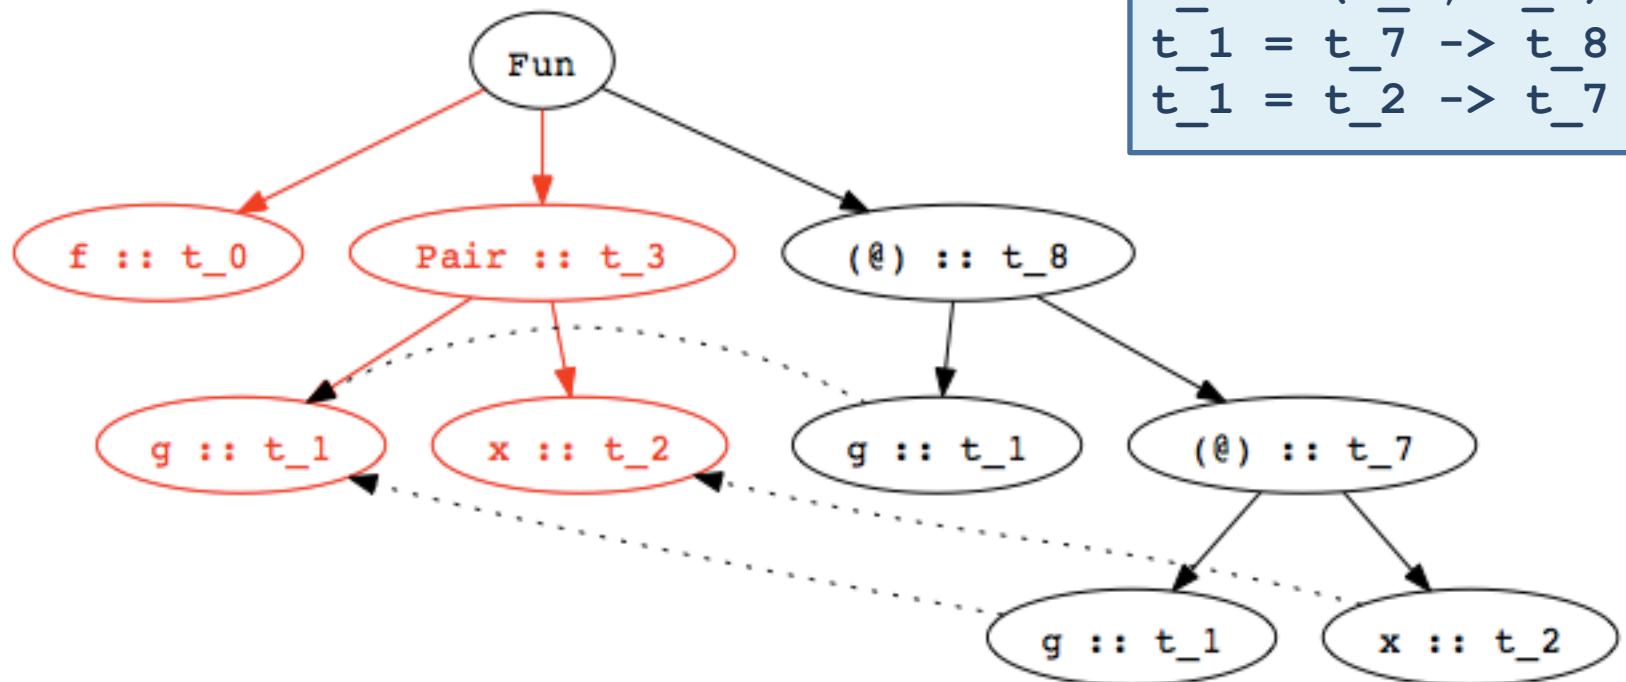


Another Example

- Example:

```
f (g, x) = g (g x)  
> f :: (t_8 -> t_8, t_8) -> t_8
```

- Step 4:

Solve constraints

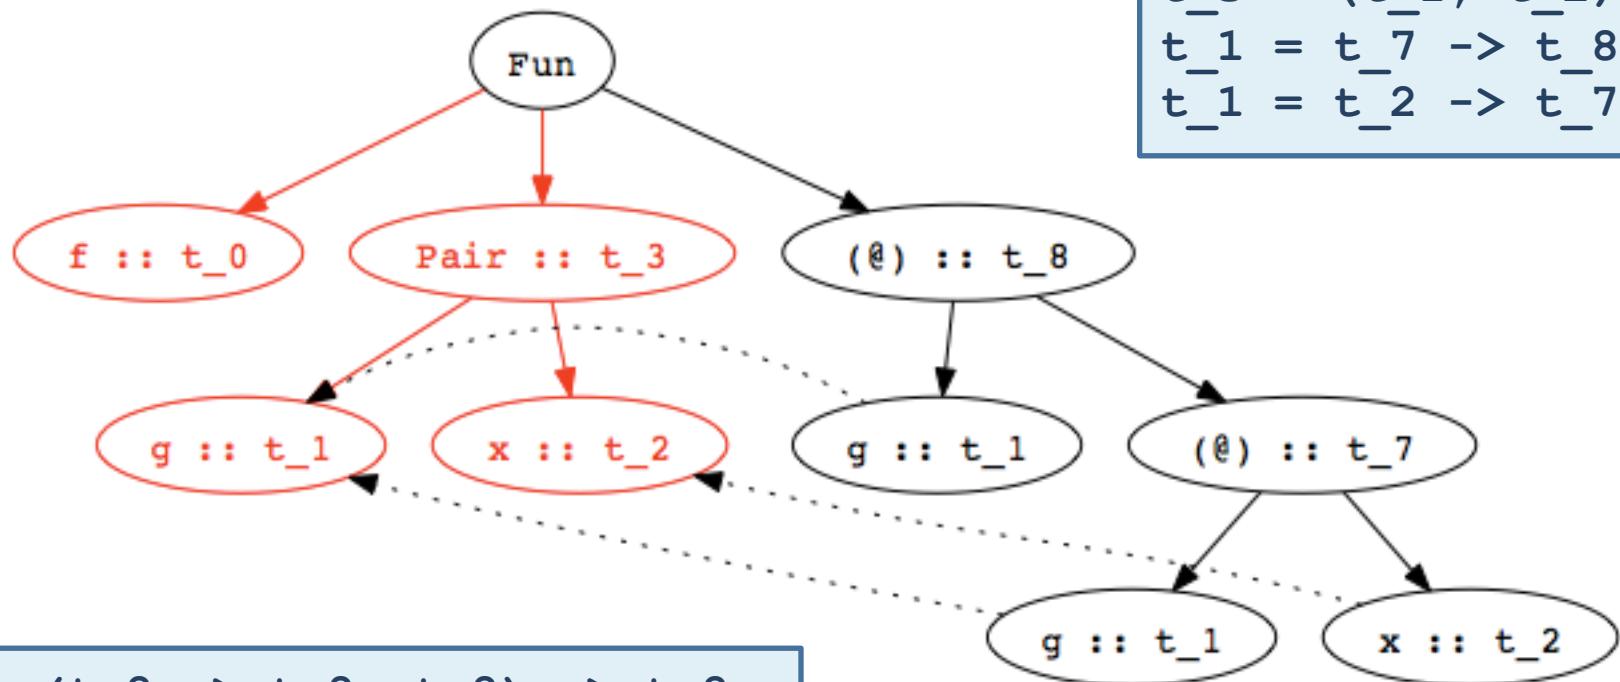


$t_0 = (t_8 \rightarrow t_8, t_8) \rightarrow t_8$

Another Example

- Example:
- Step 5:

Determine type of f
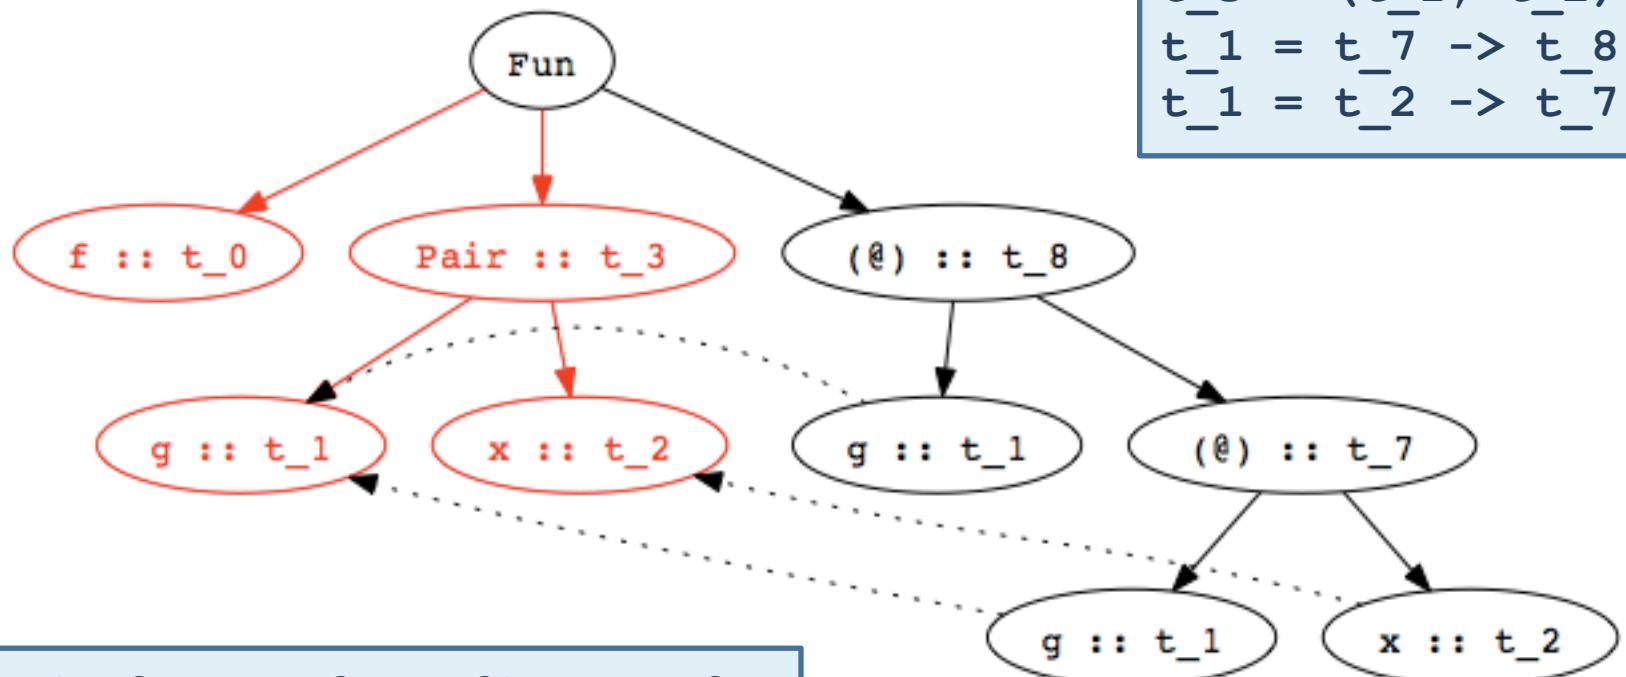
$$\begin{aligned}f(g, x) &= g(g x) \\> f :: (t_8 \rightarrow t_8, t_8) \rightarrow t_8\end{aligned}$$


Polymorphic Datatypes


- Functions may have multiple clauses

```
length [] = 0
length (x:rest) = 1 + (length rest)
```

- Type inference
 - Infer separate type for each clause
 - Combine by adding constraint that all clauses must have the same type
 - Recursive calls: function has same type as its definition


Type Inference with Datatypes

- Example: `length (x:rest) = 1 + (length rest)`
- Step 1: Build Parse Tree

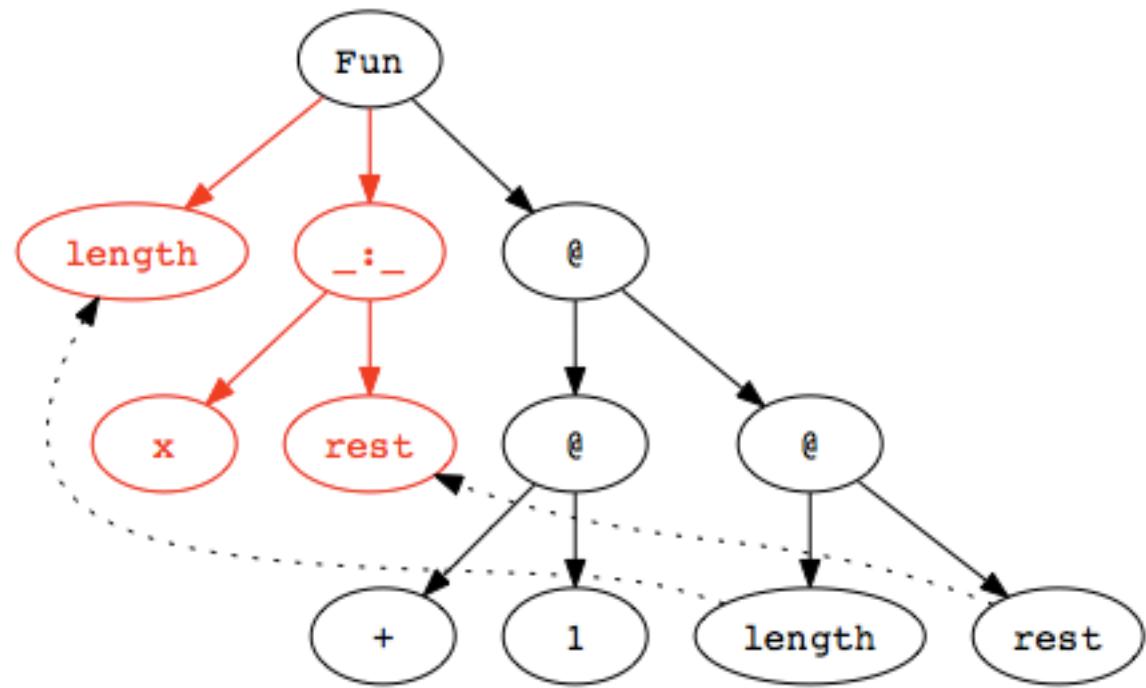


Type Inference with Datatypes

- Example: `length (x:rest) = 1 + (length rest)`
- Step 2: Assign type variables

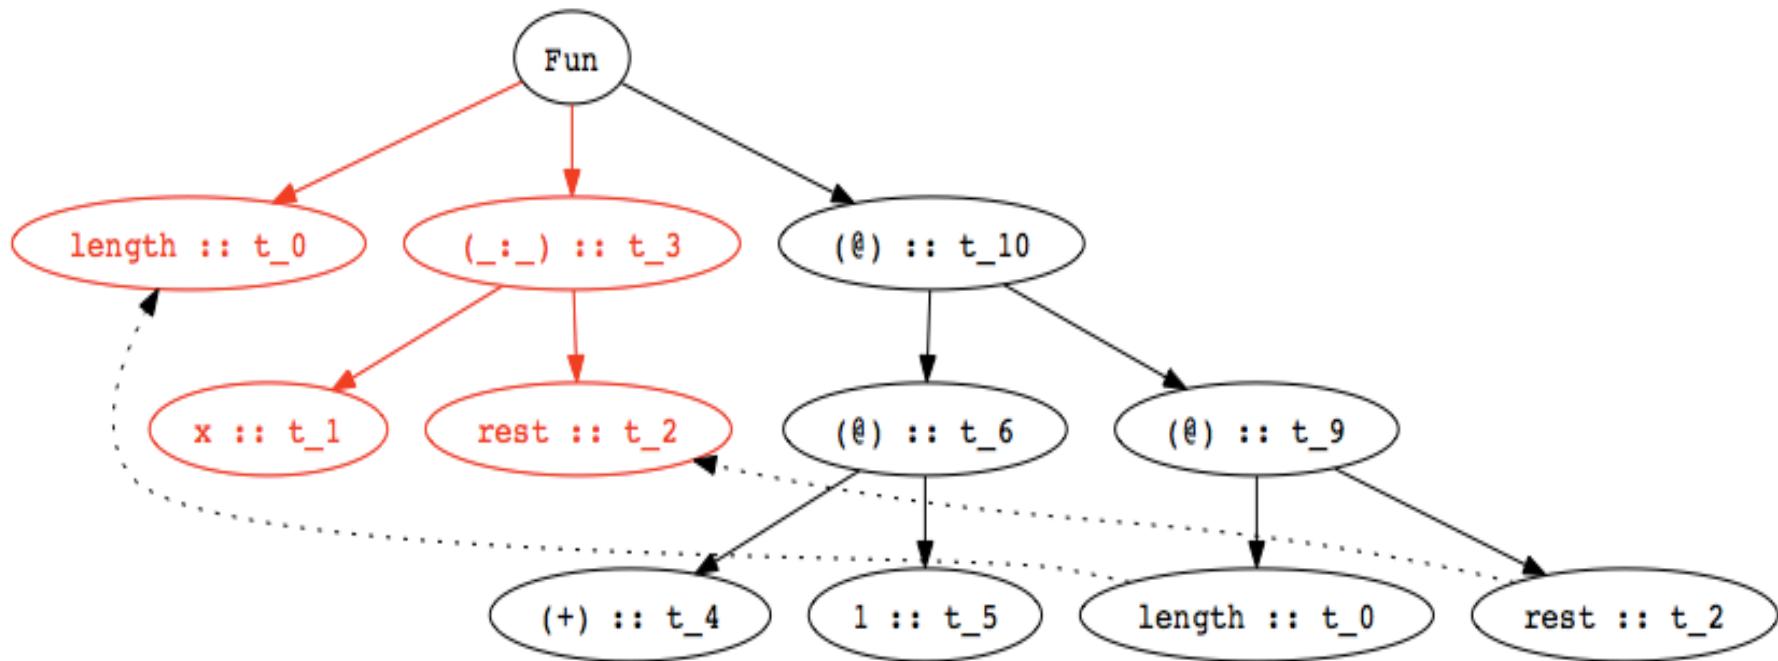


Type Inference with Datatypes

- Example: $\text{length } (\text{x}:\text{rest}) = 1 + (\text{length rest})$
- Step 3: Generate constraints

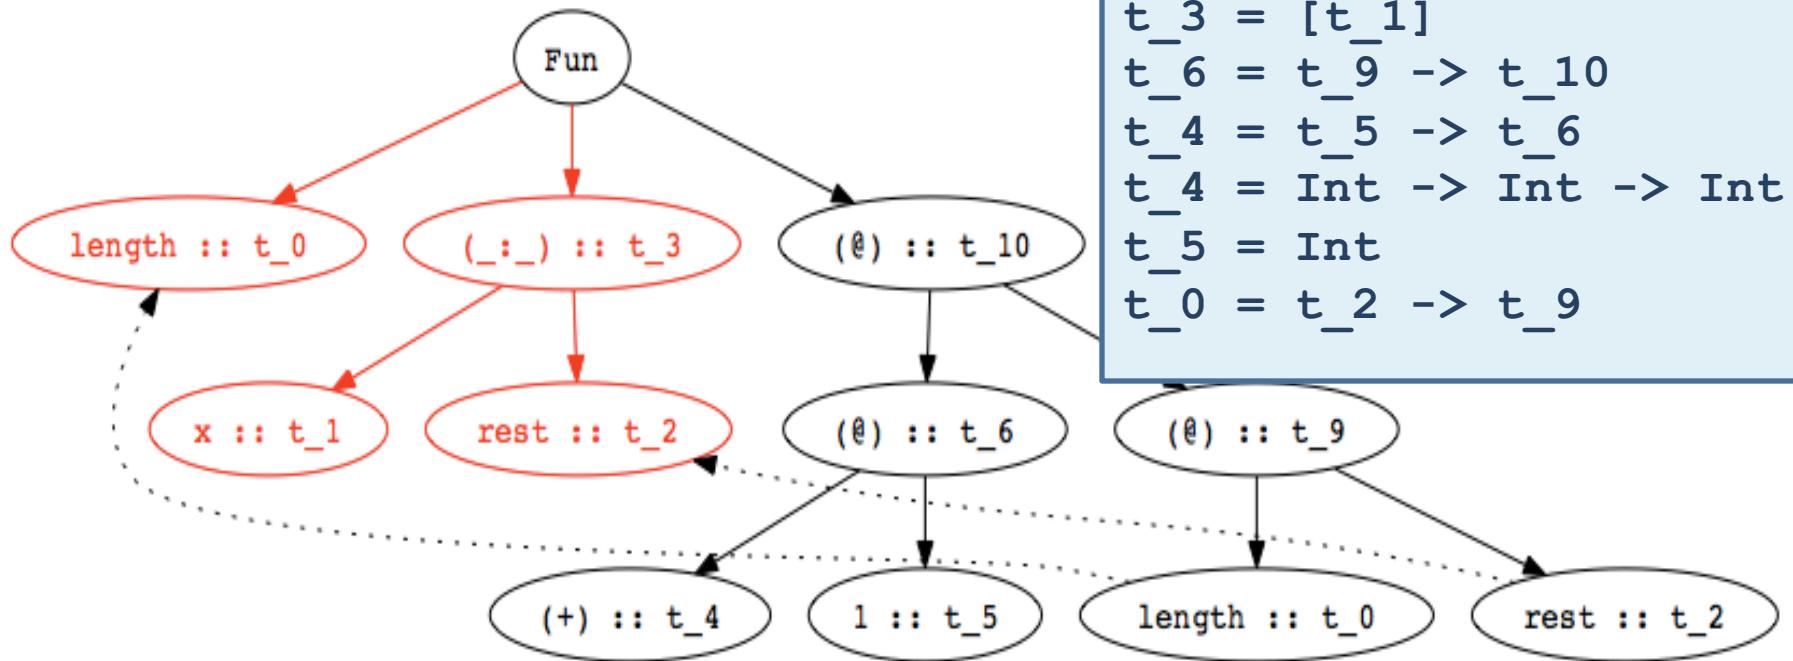

Type Inference with Datatypes

- Example: `length (x:rest) = 1 + (length rest)`
- Step 3: Solve Constraints

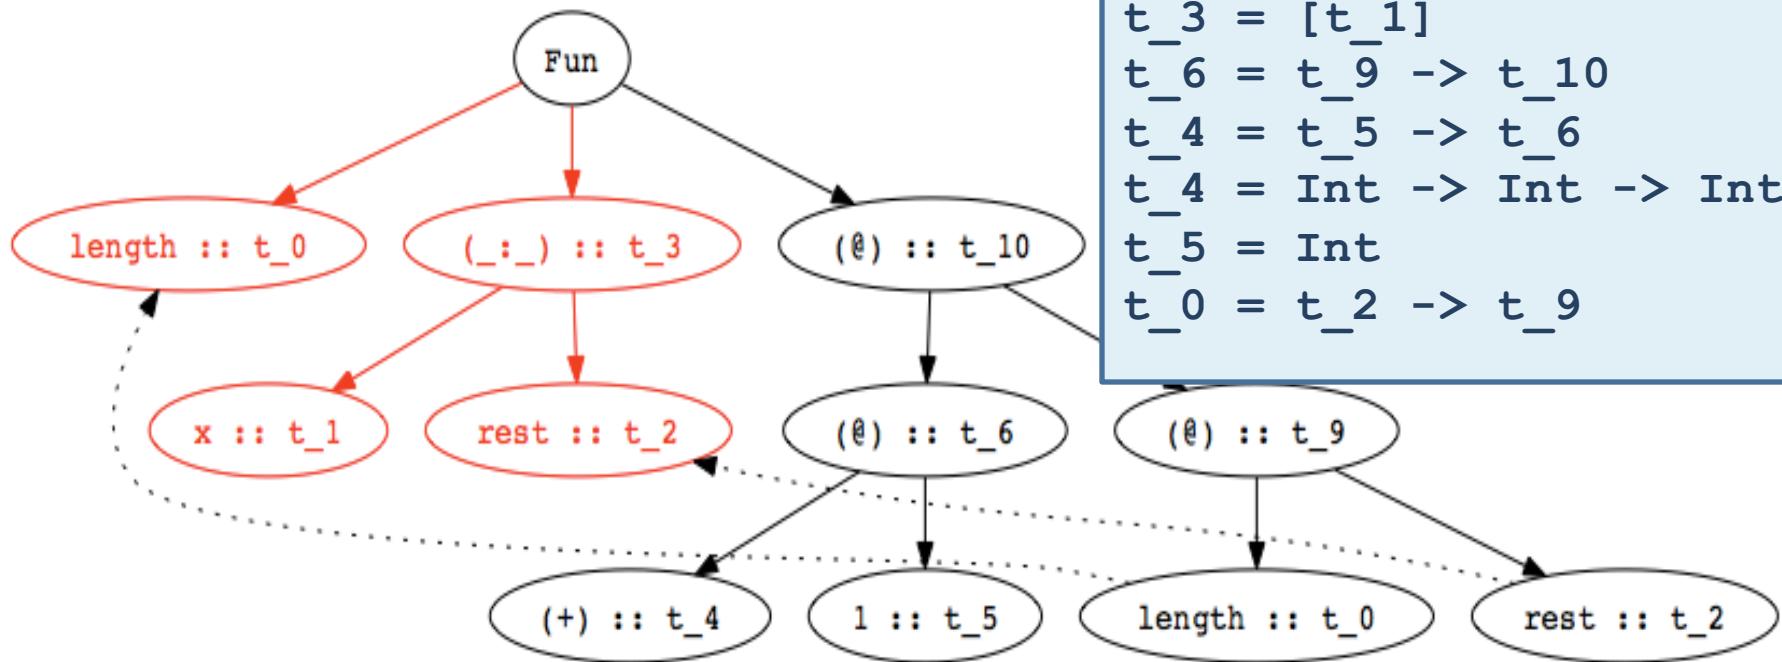

`t_0 = [t_1] -> Int`

Multiple Clauses

- Function with multiple clauses

```
append ([] ,r) = r
append (x:xs, r) = x : append (xs, r)
```

- Infer type of each clause

- First clause:

```
> append :: ([t_1], t_2) -> t_2
```

- Second clause:

```
> append :: ([t_3], t_4) -> [t_3]
```

- Combine by equating types of two clauses

```
> append :: ([t_1], [t_1]) -> [t_1]
```

Most General Type

- Type inference produces the *most general type*

```
map (f, []) = []
map (f, x:xs) = f x : map (f, xs)
> map :: (t_1 -> t_2, [t_1]) -> [t_2]
```

- Functions may have many less general types

```
> map :: (t_1 -> Int, [t_1]) -> [Int]
> map :: (Bool -> t_2, [Bool]) -> [t_2]
> map :: (Char -> Int, [Char]) -> [Int]
```

- Less general types are all instances of most general type, also called the *principal type*

Type Inference Algorithm

- When Hindley/Milner type inference algorithm was developed, its complexity was unknown
- In 1989, Kanellakis, Mairson, and Mitchell proved that the problem was exponential-time complete
- Usually linear in practice though...
 - Running time is exponential in the depth of polymorphic declarations

Information from Type Inference

- Consider this function...

```
reverse [] = []
reverse (x:xs) = reverse xs
```

... and its most general type:

```
> reverse :: [t_1] -> [t_2]
```

- What does this type mean?

Reversing a list should not change its type, so there must be an error in the definition of reverse!

Type Inference: Key Points

- Type inference computes the types of expressions
 - Does not require type declarations for variables
 - Finds the most general type by solving constraints
 - Leads to polymorphism
- Sometimes better error detection than type checking
 - Type may indicate a programming error even if no type error.
- Some costs
 - More difficult to identify program line that causes error.
 - Natural implementation requires uniform representation sizes.
- Idea can be applied to other program properties
 - Discover properties of program using same kind of analysis

Summary

- Types are important in modern languages
 - Program organization and documentation
 - Prevent program errors
 - Provide important information to compiler
- Type inference
 - Determine best type for an expression, based on known information about symbols in the expression