

# 301AA - Advanced Programming

Lecturer: **Andrea Corradini**

[andrea@di.unipi.it](mailto:andrea@di.unipi.it)


<http://pages.di.unipi.it/corradini/>

*AP-12: Parametric Polymorphisms:  
C++ Templates*

# Outline

- Universal parametric polymorphism (generics)
- C++ templates
- Templates vs Macros in C++
- Specialization and instantiation of templates

# Classification of Polymorphism

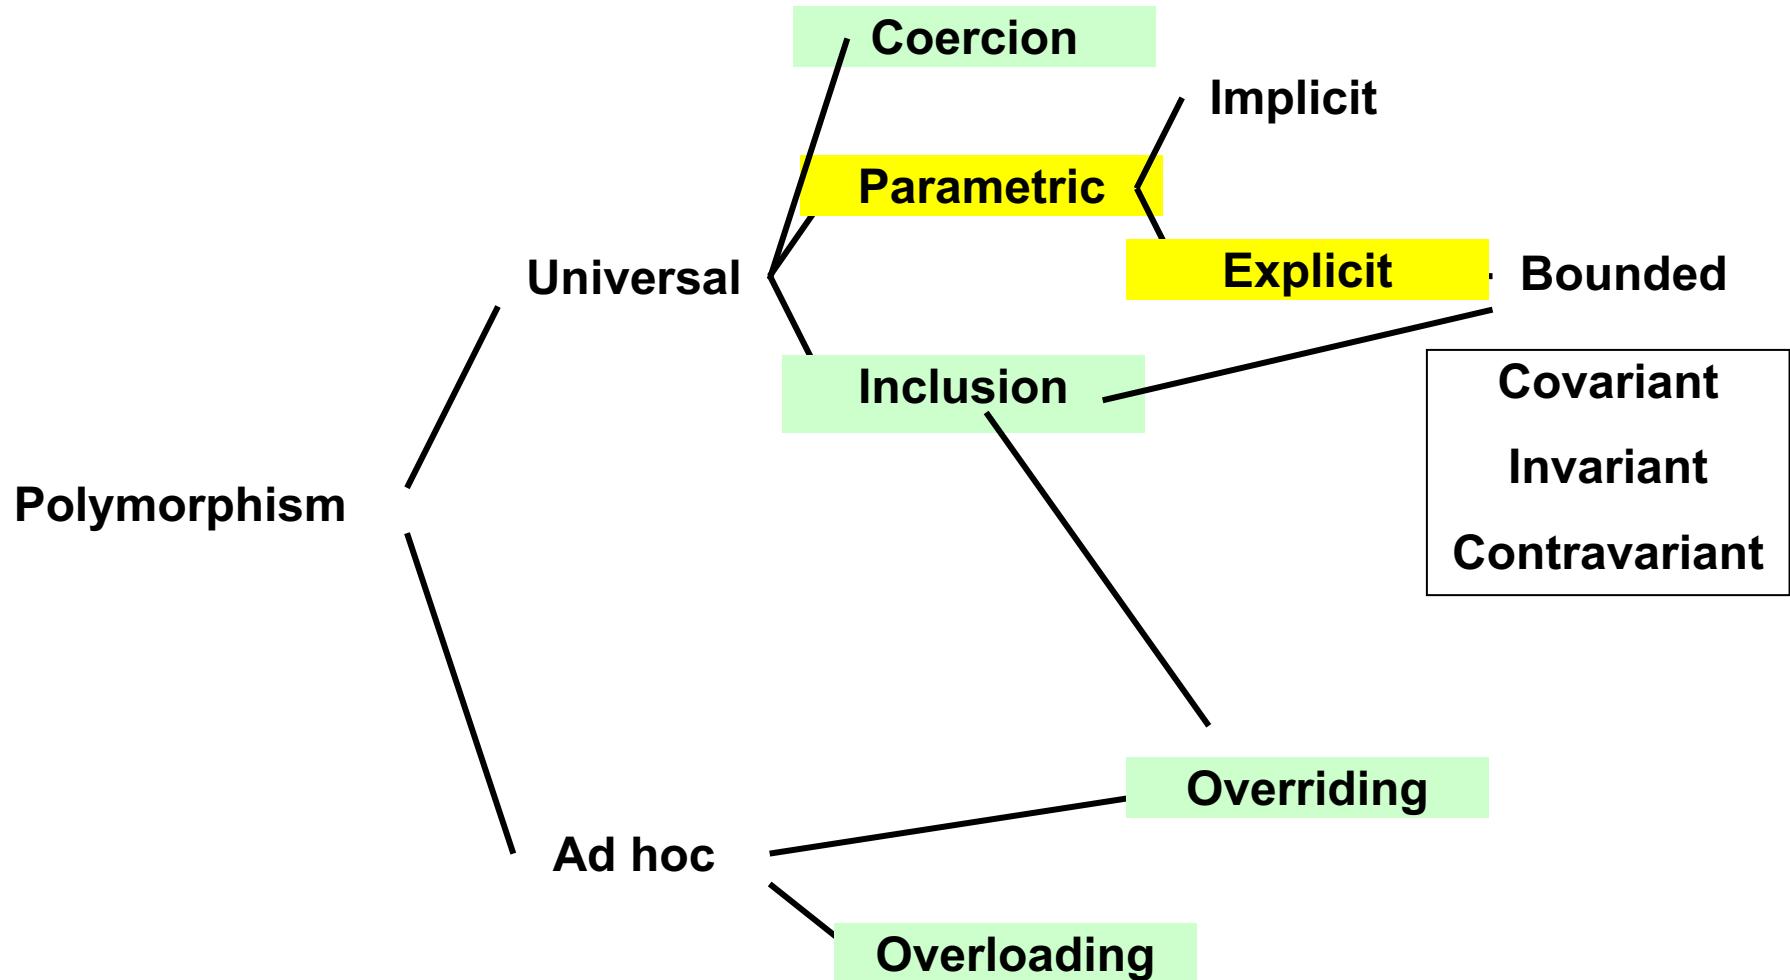

# Parametric polymorphism, or **generic programming**

- [C++] **Templates**, since ~1990
  - Function and class templates; type variables
  - Each concrete instantiation produces a copy of the generic code, specialized for that type:  
**monomorphization**
- [Java] **Generics**, since Java 1.5 (Java 5, 2004)
  - Generic methods and classes; type variables
  - Strongly type checked by the compiler
  - **Type erasure**: type variables are **Object** (+/-) at runtime

# Function Templates in C++

- Support parametric polymorphism
- Type parameters can also be primitive types (unlike Java generics)
- Example of polymorphic square function:

```
template <class T>      // or <typename T>
T sqr(T x) { return x * x; }
```

- Compiler/linker automatically generates one version for each parameter type used by a program
- Parameter types are inferred or indicated explicitly (necessary in case of ambiguity)
- The site **Compiler Explorer** <https://godbolt.org/> allows to inspect the compiled code.

# Function Templates: sqr

```
template<class T> // or <typename T>  
T sqr(T x) { return x * x; }
```

```
int a = 3;
```

```
double b = 3.14;
```

```
int aa = sqr(a);
```

```
double bb = sqr(b); // also sqr<double>(b)
```

Generates

```
int sqr(int x){return x*x;}
```

Generates

```
double sqr(double x){return x*x;}
```

# Function Templates: `sqr`

- Works for user-defined types as well

```
class Complex {
public:
    double real; double imag;
    Complex(double r, double im) : real(r), imag(im) {};
    Complex operator*(Complex y) { //overloading of *
        return Complex(
            real * y.real - imag * y.imag,
            real * y.imag + imag * y.real);
    } };
}
```

```
{ ...
    Complex c(2, 2);
    Complex cc = sqr(c);
    cout << cc.real << " " << cc.imag << endl;
... }
```

# Function Templates and Type Inference: GetMax

```
template <class T>
T GetMax (T a, T b) {
    T result;
    result = (a>b) ? a : b;
    return (result);
}
{...
    int i = 5, j = 6, k;
    long l = 10, m = 5, n, v;
    k = GetMax<int>(i, j); //ok
    n = GetMax(l, m);           //ok: GetMax<long>
// v = GetMax(i, m);           //no: ambiguous
    v = GetMax<int>(i,m);       //ok
...
}
```

- Decoupling the two arguments:

```
template <class T, class U>
T GetMax (T a, U b) {
    return (a>b) ? a : b;
}
```

# Templates vs Macros in C++

- Macros can be used for polymorphism in simple cases

```
#define SQR(T) T sqr(T x) {return x * x; }
SQR(int);           // int sqr(int x) {return x * x; }
SQR(double);        // double sqr(double x) {return x * x; }

{   int a = 3, aa; double b = 3.14, bb;
    aa = sqr(a);
    bb = sqr(b);
... }
```

- Macros are executed by the preprocessor, templates by the compiler
- Macro expansion visible compiling with option **-E**
- Preprocessor makes only (possibly parametric) textual substitution. No parsing, no static analysis check.

# Macros' limits

```
#define sqr(x)  ( (x) * (x) )    // problem?  
  
int a = 2;                  // equivalent to  
int aa = sqr(a++);         // int aa = ((a++) * (a++));  
// value of aa?             // aa contains 6
```

- Code is copied: side effects duplicated

```
#define fact(n)  (n == 0) ? 1 : fact(n-1) * n  
                      // problem?  
// compilation fails because fact is not defined
```

- Recursion not possible

# More on C++ templates

- Non-type template arguments
- Specialization of templates
- Instantiation and Overloading resolution
- Partial support for “separate compilation”

# Non-type template arguments

- The template parameters can also include expressions of a particular type:

```
template <class T, int N>
T fixed_multiply (T val)
{
    return val * N;
}

int main() {
    std::cout << fixed_multiply<int,2>(10) << '\n';      // 20
    std::cout << fixed_multiply<int,3>(10) << '\n';      // 30
}
```

- the value of template parameters is determined on compile-time
- the second template argument needs to be a constant expression

# Template (partial) specialization

A (function or class) template can be **specialized** by defining a template with

- same name
- more specific parameters (partial specialization) or no parameters (full specialization)

Advantages

- Use better implementation for specific kinds of types
- Intuition: similar to **overriding**
- Compiler chooses most specific applicable template

# Template specialization, example

**/\* Primary template \*/**

```
template <typename T> class Set {  
    // Use a binary tree  
};
```

**/\* Full specialization \*/**

```
template <> class Set<char> {  
    // Use a bit vector  
};
```

**/\* Partial specialization \*/**

```
template <typename T> class Set<T*> {  
    // Use a hash table  
};
```

# Need of template specialization, an example

```
template <class T>
T GetMax(T a, T b)
{ return a > b ? a : b ; }

int main()
{
    cout << "max(10, 15) = " << GetMax(10, 15) << endl ;
    cout << "max('k', 's') = " << GetMax('k', 's') << endl ;
    cout << "max(10.1, 15.2) = " << GetMax(10.1, 15.2) << endl ;
    cout << "max(\"Al\", \"Bob\") = " << GetMax("Al", "Bob") << endl ;
    return 0 ;
}
```

## Output:

```
max(10, 15) = 15
max('k', 's') = s
max(10.1, 15.2) = 15.2
max("Al", "Bob") = Al //not expected
```

## Output of main with specialization:

```
max(10, 15) = 15
max('k', 's') = s
max(10.1, 15.2) = 15.2
max("Al", "Bob") = Bob
```

# Template Metaprogramming

- Templates can be used by a compiler to generate temporary source code, which is merged by the compiler with the rest of the source code and then compiled
- It is Turing complete
- Only constant expressions
- No mutable variables
- No support by IDE's, compilers and other tools

# Example: computing at compile time

```
#include <iostream>

int triangular(int n) {
    return (n == 1)? 1 : triangular(n-1) + n;
}

int main () {
    int result = triangular(20);
    std::cout << result << '\n';
}
```

```
template <int t>
int triangular() {
// constexpr  int triangular() {
    return triangular<t - 1>() + t;
}
template <>
int triangular<1>() {
// constexpr  int triangular<1>() {
    return 1;
}
int main () {
    int result = triangular<20>();
    std::cout << result << '\n';
}
```

- C++ function to compute sum of first  $n$  integers
- C++ template with specialization computing the same
- **constexpr** “invites” the compiler to evaluate the expression

# C++ Template implementation

- Compilation on demand: the code of a template is not compiled until an instantiation is required
- Compile-time instantiation (**Static binding**)
  - Compiler chooses template that is best match
    - Based on partial (specialization) order of matching templates
    - There can be more than one applicable template
  - Template instance is created
    - Similar to syntactic substitution of parameters
    - Can be done after parsing, etc., thus language-aware
  - **Overloading resolution** *after* substitution
    - Fails if some operator is not defined for the type instance
    - Example: if T does not implement > in **GetMax**

```
template <class T>
T GetMax(T a, T b)
{ return a > b ? a : b ; }
```

# On instantiation

- In C/C++ usually the *declarations* of functions (*prototypes*) are collected in a *header file* (<name>.h), while the actual *definitions* are in a separate file
- In the case of **template functions**, the compiler needs both its declaration and its definition to instantiate it.
- Thus limited forms of “separate compilation”: cannot compile *definition* of template and code instantiating the template separately.
- Explicit instantiation possible. Example:

```
template int GetMax<int>(int a, int b);
```